## KST4A-2/M12

4-pole cable box M12, angled,

with 2 m PVC cable, 4 x 0.25 mm²

KST4A-5/M12

4-pole cable box M12, angled,

with 5 m PVC cable, 4 x 0.25 mm²
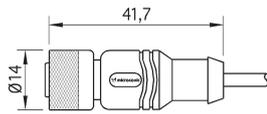
KST5A-2/M12

5-pole cable box M12, angled,

with 2 m PVC cable, 5 x 0.25 mm²

KST5A-5/M12

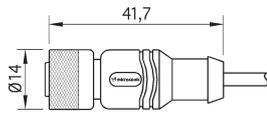5-pole cable box M12, angled,

with 5 m PVC cable, 5 x 0.25 mm²

KST4G-2/M12

4-pole cable box M12, straight,

with 2 m PVC cable, 4 x 0.25 mm²

KST4G-5/M12

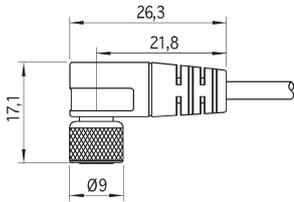4-pole cable box M12, straight,

with 5 m PVC cable, 4 x 0.25 mm²

KST5G-2/M12

5-pole cable box M12, straight,

with 2 m PVC cable, 5 x 0.25 mm²

KST5G-5/M12

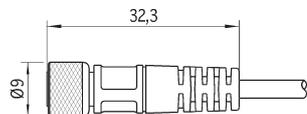5-pole cable box M12, straight,

with 5 m PVC cable, 5 x 0.25 mm²

KST4A-2/M8

4-pole cable box M8, angled,

with 2 m PVC cable, 4 x 0.25 mm²

KST4A-5/M8

4-pole cable box M8, angled,

with 5 m PVC cable, 4 x 0.25 mm²
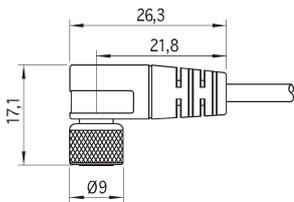
KST4G-2/M8

4-pole cable box M8, straight,

with 2 m PVC cable, 4 x 0.25 mm²

KST4G-5/M8

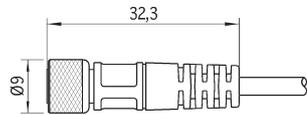4-pole cable box M8, straight,

with 5 m PVC cable, 4 x 0.25 mm²

KST3A-2/M8

3-pole cable box M8, angled,

with 2 m PVC cable, 3 x 0.25 mm²

KST3A-5/M8

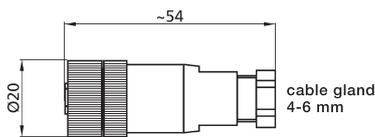3-pole cable box M8, angled,

with 5 m PVC cable, 3 x 0.25 mm²

KST3G-2/M8

3-pole cable box M8, straight,

with 2 m PVC cable, 3 x 0.25 mm²

KST3G-5/M8

3-pole cable box M8, straight,

with 5 m PVC cable, 3 x 0.25 mm²

STG4/M12

4-pole cable box, straight,

for individual assembly

STG5/M12

5-pole cable box, straight,

for individual assembly

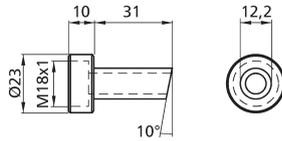cable gland
4-6 mm

View on cable box
KST3…/M8   KST4…/M8

○ Pole 1: brown
○ Pole 2: white
○ Pole 3: blue
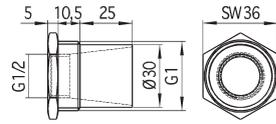○ Pole 4: black

View on cable box
KST4…/M12   KST5…/M12

○ Pole 1: brown
○ Pole 2: white
○ Pole 3: blue
○ Pole 4: black
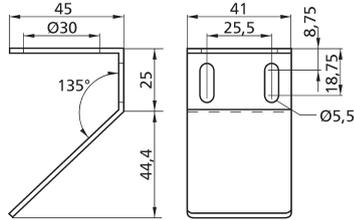○ Pole 5: grey

◣microsonic ::: Accessories :::

Screw-on reducer M18

Screw-on reducer for pico and lpc sensors for reduction of the beam spread diameter

## Screw-on reducer G1/2

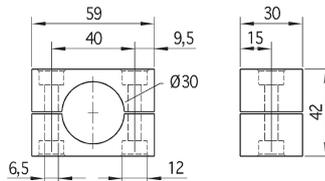Screw-on reducer for hps sensors with 1 " external thread and splashguard funnel

UF-90/M30

Beam deflector for ultrasonic sensors up to 1.3 m operating range in M30x1.5 threaded sleeves
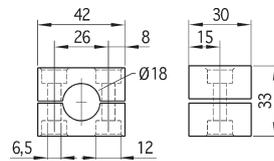
UF-90/M18

Beam deflector for ultrasonic sensors up to 0.35 m operating range in M18x1 threaded sleeves

BF-30

Fastening clamp for sensors with M30 threaded sleeve, material PA

BF-18

Fastening clamp for sensors with M18 threaded sleeve, material PA

MW-ZWS1

Mounting bracket for zws sensor

MW-ZWS2

Mounting bracket for zws sensor

MW-ZWS3

Mounting bracket for zws sensor

SyncBox1

For the external synchronisation of more than ten mic+ sensors.

Approx. 50 mic+ sensors can be synchronised.

microsonic ::: Accessories :::