


CONFIGURABLE SAFETY CONTROLLERS

MOSAIC MO4C

Output expansion units.

4 inputs for Start/Stop interlock and device monitoring (EDM),
4 OSSD pairs and 4 programmable digital signal outputs.
Clamp terminal blocks.
Compatible: M1-M1S

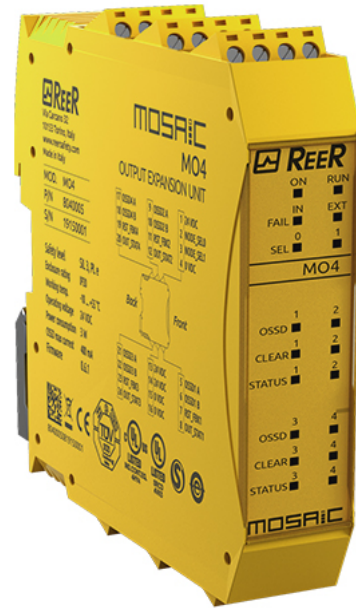

Certifications:



Technical data:

Family	MOSAIC
Code	1100131
Safety level (SIL / PL)	SIL 3 - SILCL 3 according to IEC 61508 - IEC 62061 / PL e - Cat. 4 according to ISO 13849-1
Power supply (VDC)	24 ± 20%
Connections	Removable terminal blocks, clamp contacts
Safety inputs	-
Safety outputs	4 pairs PNP - 400mA at 24 VDC with protection against short circuit, overload and reverse polarity
Safety relay outputs	-
CCF (ISO 13849-1)	80%
system MTTFd (ISO 13849-1) years	715,70
PFHd (IEC 61508)	5.84E-9
Degree of protection	IP 20 for housing - IP 2X for terminal block
Operating temperature (°C)	From -10 to 55
Storage temperature (°C)	from -20 to +85
Programmable signalling outputs	4 PNP - 100mA
Test outputs	-
Start/Restart inputs and EDM	4
LED signalling	Input/output status and fault diagnostics
USB input	-
Housing for MCM	-
MSC connector provided	yes
Connection with MSC BUS	yes
Dimensions HxWxD (mm)	108 x 22,5 x 114,5
Fastening	Rail fastening according to EN 50022-35 standard
Packaging dimensions W x H x L (mm)	160 x 135 x 60
Gross weight (Kg)	0,22

Related products:

[MOSAIC CPM](#)

See technical drawing in the next page.

Technical drawing:

